



**BOX CONTENTS**

1. 20D739S-1 NTSC or 21D739S-1 PAL Color Camera
2. Mounting Plate attached to housing with 2 screws. (movable for top mounting)
3. Operation manual

**SAFEGUARDS & WARNINGS**


1. Read instructions before operating camera.
2. Avoid mounting in direct sun light.
3. Installation and repair should be undertaken by authorized personnel only.

Note: This camera comes w/BLC default ON.


**INSTALLATION TIPS**

If the camera is to be mounted outdoors, or in hot, humid, or otherwise harsh environments, a secondary enclosure should be used.

**CONNECTORS**


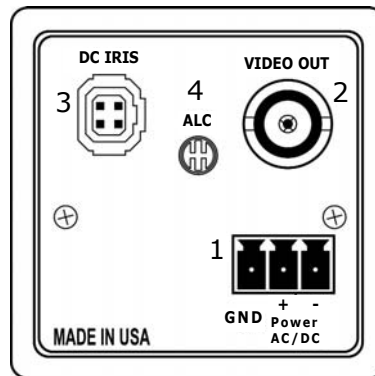


**Pin Assignment**



**DC Auto Iris (DC)**

1. Control -
2. Control +
3. Drive +
4. Drive -



**CONNECTORS**

1. The camera has a 3 position terminal block located at the rear. It can accept either 24VAC or 12VDC inputs and is not polarity sensitive.
2. Composite Video Output. This is a standard Male PC mounted BNC connector.
3. DC Iris. This is a standard 4 position DC Iris connector.
4. **ALC Level Control**  
 The 20/21D739S-1 can operate an auto iris lens. For ALC adjustment, adjust the potentiometer at the back of the camera.

**Power Board Controls**

The camera has 24VAC / 12VDC capability.

**SPECIFICATIONS**

	20D739S-1	21D739S-1
<b>Electrical</b>	NTSC	PAL
Image Sensor	1/3" interline CCD	
Active Pixels (HxV)	768 x 492	752 x 585
Resolution	>480 TVL	
Sensitivity	0.5 lux at 30 IRE (AGC max)	
Signal to Noise Ratio	>48 dB	
Gamma	0.45	
Gain	Automatic	
Synchronization	Internal	
Backlight Compensation	Default ON	
Contour Enhancement	Default ON	
White Balance	Auto 2300 - 7500K	
Iris Signal	Electronic or direct drive (auto detect)	
Iris Controls	ALC pot for direct drive iris	
Video Output	Composite video 1Vp-p 75 Ohms	
Power Supply	12 - 28VAC 50/60Hz 10.8 - 39VDC polarity independent	
Power Consumption	< 2.5W	

**Environmental**

Operating Temperature	-15° C ~ 55° C (05° F ~ 131° F) withstands temperature up to 75° C (167° F)
Storage Temperature	-25° C ~ 70° C (-13° F ~ 158° F)

**Mechanical**

Dimensions WxHxD	50mm x 50mm x 66.4mm (1.97" x 1.97" x 2.6")
With Connectors And Mount	50mm x 60mm x 66.4mm (1.97" x 2.4" x 2.6")
Weight	183.5g (0.40 lbs)
Lens Mounts	C, CS

**Accessories**

Included	Metal mounting plate for top/bottom mounting. Detachable power block for easy installation.
Optional	60P24VAC - 24VAC power supply 60PR12DC800 - 12VDC power supply 60VZZ0030 - C Mount w/ adapter ring

**BACK FOCUS ADJUSTMENT**

Adjust the back focus only if the lens is not operating within its specified focal range (i.e. 1.0m ~ infinity).

1. With a allen wrench (not supplied), loosen the two lock screws on the front panel.
2. Loosen the back focus ring.
3. To properly back focus the lens, turn the small back focus ring counter-clock-wise to reduce the focal length, or clock-wise to increase the focal length, until the desired focus is attained.
4. Tighten the lock screws to secure the back focus ring.

