

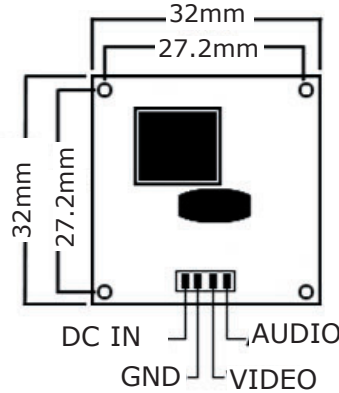


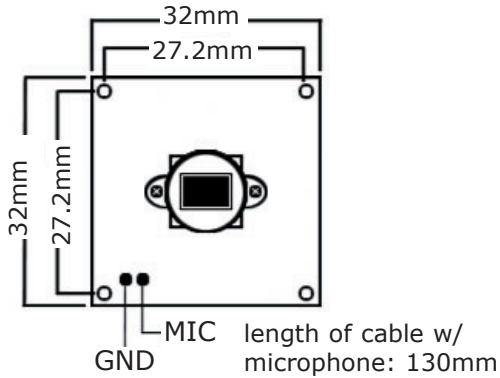

Camera Features

- 32mm x 32mm Single Board
- NTSC or PAL
- 12VDC
- Line Microphone*

* Note: Equipment with audio recording capabilities is intended to be used only for legal and proper purposes. The customer assumes all liability related to legal and proper use per VIS waiver FOR-03-021.

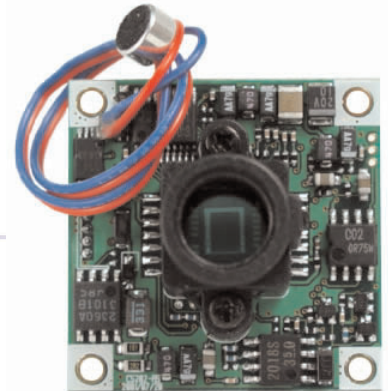

Technical Specifications

Electrical

	20E245 NTSC	21E245 PAL
CCD Sensor	1/4" Sony CCD	
Horizontal Resolution	>330 (TVL)	
Sensitivity	0.54 lux, 30 IRE	
Signal to noise ratio	>45 dB (AGC off)	
Gamma	0.45	
Synchronization	Internal	
Iris	Auto	
Video output	1Vp-p 75 ohms composite	
Power Supply	±12VDC	
Power Consumption	<1.1W	

Environmental

Ambient operating temp.	-10° C ~ 55° C
Storage temp.	-20° C ~ 60° C

Mechanical

Dimensions WxH	32mm x 32mm
Weight	13g
Lens mount (1/3")	M-9, (9mm diameter)
M-9 Lens Options	L3 = 2.9mm (32SN2920N) L4 = 3.6mm (32SN3620N) L6 = 6mm (32SN0620N) L8 = 8mm (32SN0825N)