




Monitor Features

- 4" TFT LCD
- Portable Case with Battery
- BNC Video Test Cable
- Audio In/Out
- Glare Shield
- Video Looping Output

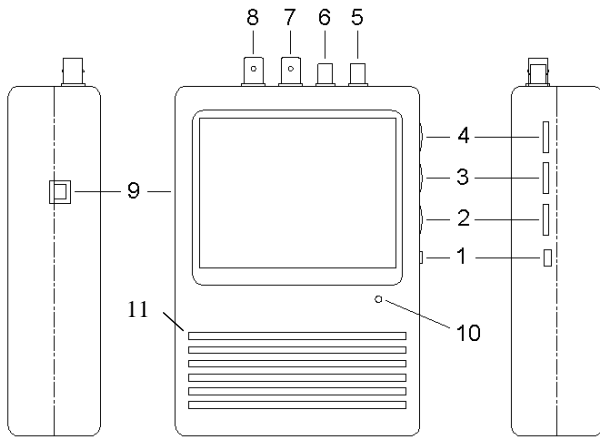

01. Monitor Power ON/OFF
02. Volume
03. Control Brightness
04. Color
05. Audio OUT
06. Audio IN
07. Video OUT
08. Video IN
09. DC 12V Input
10. Charger Indicator
11. Speaker

Technical Specifications

Electrical

		45M040T
Display	4" Color TFT LCD	
Number of Dots	480 (W) x 234 (H)	
Display Area	82.11(W) x 61.77 (H)	
Dot Pitch	0.171 (W) x 0.264 (H)	
Color Configurations	R.G.B delta	
Back Light	LED B/L	
Input Signal	Video:	NTSC & PAL (auto-switch) composite video signal, 1.0 Vp-p/75 ohm. Negative
	Audio:	150~250mVp-p / 1.0
Input/Output Terminal	Video:	BNC Auto Termination
	Audio:	RCA Jack
Viewing Angle (min)	U/D/L/R 10/30/45/45	
Brightness	250 nit (typ.)	
Contrast Ratio	150:1 typical	
Response Time	Tr: 15ms Tf: 20ms (Typ)	
Power Voltage	1.2Volts x 6 (Size "AA") 2200mAH Rechargeable batteries	
Power Consumption	3.0 W max	

Environmental

Operating Temperature	-10° C ~ 60° C (14° F ~ 140° F)
Storage Temperature	-20° C ~ 80° C (-4° F ~ 176° F)
Operating Humidity	Max.85%RH
Storage Humidity	Max.85%RH

Mechanical

Dimensions W x H x D	152mm x 105.6mm x 38.6mm (5.98" x 4.15" x 1.51")
Weight	320g / 8.11 oz (w/o battery)
Side Panel Controls	Volume, Color, Contrast, Brightness
Housing Construction	ABS Plastic (LCD), Leather Case
Lamp Life-time	10,000hr min. (Temp=25°C)

Accessories

Included	12V 1A Power Supply, 6 (AAA) NI-MH rechargeable batteries, power adaptor, leather case, Belt
----------	--