




### Monitor Features

- NTSC/PAL Auto Selectable
- TFT Active Matrix
- Dual A/V Input
- On Screen Display
- Includes Mounting Bracket & Power Adapter
- RoHS Compliant

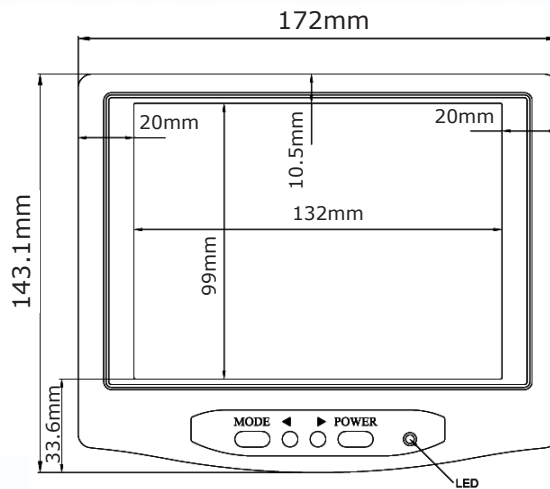

### Technical Specifications

#### Electrical

45M064	
Operating System	NTSC/ PAL auto selectable
Picture Size	6.4" diagonal
Resolution (H x V)	960 x 234 pixels
LCD Type	TFT active matrix, R.G.B. stripe array
Dot Pitch (W x H)	0.135mm x 0.416mm
Brightness	330 cd/m <sup>2</sup>
Contrast Ratio	350: 1
Response Time	40ms
Backlight	CCFL
Mirror Mode	On / Off
Horizontal Flip	On / Off
Input Signal	1Vp-p composite video at 75 Ohms
Video Angle	Left 60°, Right 60°, Up 40°, Down 55°
Audio Input	30m ~ 100mVp-p 2 channels
Lamp Life-time	30,000 hrs
Power Source	12VDC / 24VAC
Power Consumption	7.5W (max)

#### Environmental

Operation Temperature	-20° C ~ 70° C (32° F ~ 158° F)
Storage Temperature	-30° C ~ 80° C (-22° F ~ 176° F)
Operating Humidity	80% RH
Storage Humidity	80% RH

#### Mechanical

Dimensions W x H x D	172mm x 143.1mm x 14.3mm 6.77" x 5.63" x 0.56"
Weight	588 ±5g (1.25 lb)
External Controls	Brightness, contrast, tint (NTSC Only), color, volume, mirror mode, horizontal flip
Video/ Audio Input Connector	Mini phone jack / mini phone plug to RCA (female)
Safety Standards	FCC, CE, UL