





Monitor Features

- NTSC/PAL Auto Detect
- High Resolution (1280 x 1024 Pixels)
- Inputs/Outputs: 1 BNC Composite Video
- Auto Termination (75 Ohms)
- Anti-Glare Panel
- VESA Standard Bracket (75mm/100mm) & Desktop Mount
- Easy OSD Menu User Interface
- Remote Control

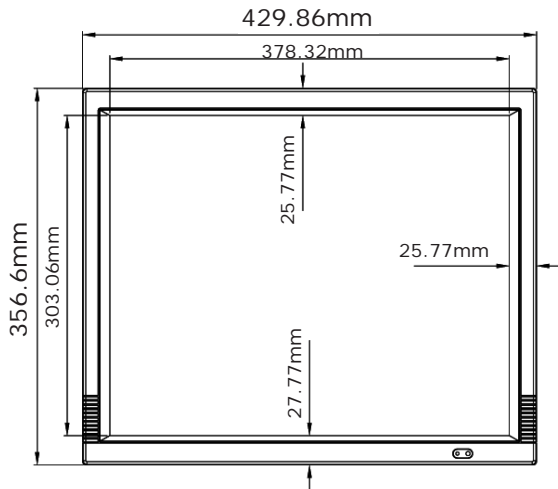

Back Panel

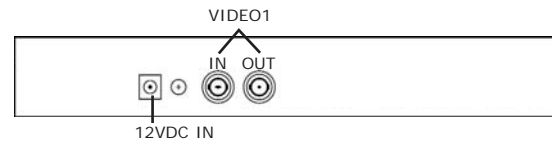

Technical Specifications

Electrical

45M19H-1	
Operating System	NTSC/ PAL auto select
Picture Size	19" diagonal
Resolution (H x V)	1280 x 1024 pixels (SXGA)
Dot Pitch (W x H)	0.294mm x 0.294mm
Brightness	250 cd/m ²
Contrast Ratio	800:1
Response Time	16ms
Backlight	CCFL
Input Signal	1 CH 1Vp-p composite video at 75 Ohms
Video Angle	Left 80°, Right 80°, Up 80°, Down 80°
Lamp Life-time	40,000 hrs
Power Source	12VDC/ 90~260V AC 60Hz/ 50Hz adapter
Power Consumption	36W (max)/ 3A

Environmental

Ambient Operating Temperature	-10° C ~ 50° C (14°F ~ 122°F)
Operating Humidity	20% - 80% R.H.

Mechanical

Dimensions W x H x D	16.92" x 14.03" x 2.62" 429.86mm x 356.6mm x 66.7mm
Weight	4.8 kg (10.58 lbs)
Accessories <i>Included</i>	Power supply, power cord, 15 pin D-sub, 12VDC / 24VAC adapter Bracket: VESA 100 standard

Optional Models

45M19H-1FW	White bezel
------------	-------------

Approbations

FCC, CE

02/13/09 PDS-45M19H-1 REV B

All data subject to change without notice.

Videology® Imaging Solutions, Inc.



37M Lark Industrial Parkway
Greenville, Rhode Island 02828 USA
Tel: (401) 949 - 5332 Fax: (401) 949 - 5276
North/South American Sales: Sales@videologyinc.com

Videology® Imaging Solutions, Europe B.V.

Neutronenlaan 4
NL-5405 NH Uden, Netherlands
Tel: +31 (0) 413 256261 Fax: +31 (0) 413 251712
European Sales: Info@videology.nl