



### Product Features

- NTSC/PAL auto detect
- High resolution (1280 x 1024)
- Inputs/outputs:
  - 2 BNC composite video
  - S-video
  - 2CH audio (RCA) & PC IN
- Auto termination (75 Ohms)
- Anti-glare panel
- VESA standard bracket (75mm/100mm) & desktop mount
- Easy OSD Menu User Interface
- Remote control

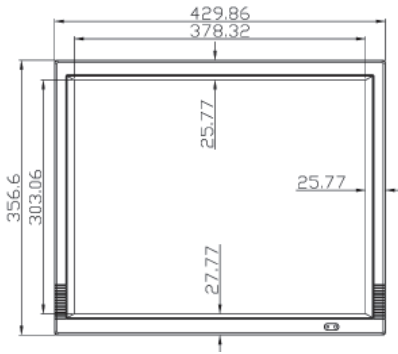

Back Panel

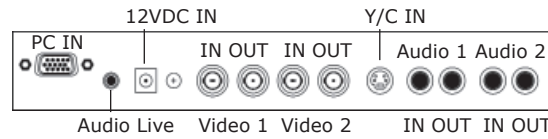

### Technical Specifications

Electrical	45M19H
Operating System	NTSC/ PAL/ XGA/ VGA/ SVGA
Picture Size	15" diagonal
Resolution (H x V)	1280 x 1024 pixels
Dot Pitch (W x H)	0.294mm x 0.294mm
Brightness	250 cd/m <sup>2</sup>
Contrast Ratio	500:1
Response Time	16ms
Backlight	CCFL
Input Signal	Video: 2 CH 1Vp-p composite video at 75 Ohms S-Video: Y=1.0Vp-p w/neg. sync C=0.285Vp-p PC: Analog RGB
Video Angle	Left 80°, Right 80°, Up 80°, Down 55°
Lamp Life-time	40,000 hrs
Power Source	12VDC/ 90~260V AC 60Hz/ 50Hz adapter
Power Consumption	18W (max)/ 1.5A

### Environmental

Operating Temperature	-10°C ~ 50°C (14°F ~ 122°F)
Operating Humidity	20% - 85% R.H.

### Mechanical

Dimensions W x H x D	429.86mm x 356.6mm x 66.7mm (16.92" x 14.03" x 2.62")
Weight	7.8 kg (17.2 lbs)
Connectors	Video: 2 BNC inputs/output 1 S-Video 4-pin Mini DIN Audio: 2 RCA input/output 1 Ø3.5mm jack input PC: 1 15-pin D-sub connector

### Accessories

Included	Power supply
	Power cord
	15 pin D-sub
	12VDC / 24VAC adapter
	Bracket: VESA 100 standard

### Safety Standards

	FCC, CE
--	---------