




### Monitor Features

- NTSC/PAL Auto Selectable
- 2 Channels of Composite Video & Audio In/Out
- PC & S-Video Inputs
- Looping or Auto Termination (75 Ohms)
- High-Performance Adaptive 3D Comb Filter Function
- VESA Standard Bracket

### Camera Features

Optional Cameras :

- Pixim Wide Dynamic Range
  - 1/3" CMOS
  - 102dB Dynamic Range
- Blue Sky High Sensitivity
  - 1/3" IL CCD
  - 480 TVL
  - 0.25 LUX

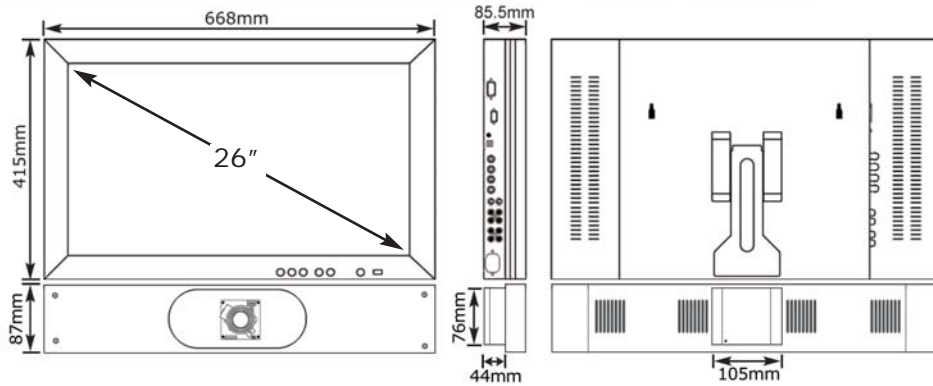

### Technical Specifications

<b>Electrical</b>		45M26-W / 45M26-B
LCD Panel		26" wide screen
Display Pixels		1366 x 768
Active Area		576mm x 324mm
LCD Profile Ratio		16:9
Display Colors		16.2M
Brightness		500 cd/m <sup>2</sup>
Contrast Ratio		800:1
Viewing Angle		Up 88°, Down 88°, Left 88°, Right 88°
Response Time		15 Tr/ 5 Tf ms
Input Signal	Video:	Composite video, 1Vp-p @75ohm
	S-Video:	Y: 1Vp-p w/ Neg. SYNC C: 0.285Vp-p
	PC:	Analog RGB (XGA/ SVGA/ VGA/ WXGA)
	Audio:	Right, Left, 50~100mVp-p
In/Out Impedance		75 ohms/ Auto Termination
Operation System		NTSC/ PAL
Output Signal	Video:	Composite video, 1Vp-p @75ohm
	S-Video:	Y: 1Vp-p w/ Neg. SYNC C: 0.285Vp-p
	Audio:	Right, Left, 50~100mVp-p
3D Comb Filter/De-Interlace		YES
PIP & POP		Optional
Power Source		90~260VAC 60Hz/ 50Hz
Power Consumption		5A/ 105W

### Environmental

Operating Temperature	-10° C ~ 60° C (14° F ~ 140° F)
Operating Humidity	20% - 80%

### Mechanical

Dimensions (W x H x D)	668mm x 415mm x 85.5mm (26.29" x 16.33" x 3.36")
Weight	9.5 kg (20.94 lbs)
Accessories Included	Power supply Power cord 15 pin D-sub Audio cable Bracket: VESA 100 standard
Connectors	Video: 2CH BNC input / output Audio: 2CH RCA R. L. input / output PC: 15-pin D-sub connector S-Video: 4-pin min-din

### Camera Specifications

	45M26-W	45M26-B
Image Sensor	1/3" CMOS - Pixim (Wide Dynamic Range)	1/3" IL CCD
Sensitivity	0.6 Lux (30 IRE) f1.2	0.25 Lux (50 IRE) f1.2
Resolution	480TVL	480TVL
Total Pixels (H X V)	742 x 552	NTSC (768 X 492) *PAL (752 x 582)
Synchronization	Internal/External	Internal
Signal to Noise Ratio	>48dB	>48dB
Gain Control	AGC	AGC
Dynamic Range	102dB Typical	50dB
Lens	4-9mm DCAI	4-9mm DCAI

\* Optional model (45M26-BP)

12/08/08 PDS-45M26-X REV A

All data subject to change without notice.

**Videology® Imaging Solutions, Inc.**



37M Lark Industrial Parkway  
Greenville, Rhode Island 02828 USA  
Tel: (401) 949 - 5332 Fax: (401) 949 - 5276  
North/South American Sales: Sales@videologyinc.com

**Videology® Imaging Solutions, Europe B.V.**

Neutronenlaan 4  
NL-5405NH Uden, The Netherlands  
Tel: +31 (0) 413 256261 Fax: +31 (0) 413 251712  
European Sales: Info@videology.nl