

6" Weather Resistant 3-Axis Vandal Domes




Whether ceiling- or wall-mounted, image orientation stays correct! Flush mount metal base with threaded conduit opening allows for use in tough environments. Vandal resistant screws and shatterproof bubble maintain integrity in banking, school, government & parking lot applications. TRUE DAY NIGHT and WIDE DYNAMIC RANGE features expand usability from bright morning sunlight through late dusk. Camera can maintain full-scene through intensive sun glare or auto headlights.

Custom Configure Your Dome. Choose one option from each column. Transfer the option's bold-type code to that column's box. String together (some boxes may be blank) to arrive at your custom model number.



Ring	Bubble	Sync	Wide Dynamic Range True Day/Night	Camera 1/3" Format	Lens	Power	NTSC/PAL
DW6	V						
DW6 6" Metal Weather Resistant Ring	V Vandal Resistant Polycarbonate Fog Overall	leave blank Internal Synchronization L Line Lock	leave blank NO WDR/TDN 9W-VB 4-9mm DC-AI lens 9T-VB 4-9mm DC-AI lens 9TW-VB 4-9mm DC-AI lens W= Wide Dynamic Range T= True Day/Night	leave blank if WDR/TDN option is selected 9 Color 460 TVL 0.5 Lux 3 B&W 570 TVL 0.05 Lux	leave blank if WDR/TDN option is selected <i>Varifocal Lens</i> VB 4-8mm DC Iris WB 2.6-5.6mm DC Iris	leave blank 12VDC/24VAC D 12VDC	leave blank NTSC P PAL

6" Dome Accessories:
12VDC & 24VAC Power Supplies
Flush Mount & Wall Mount


Technical Specifications

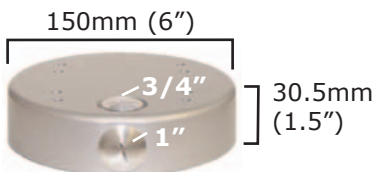

Flush Mount Bracket Base Shown with 3/4" & 1" Conduit Sized Access

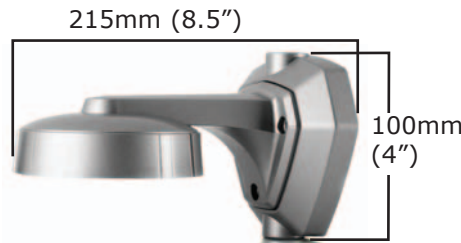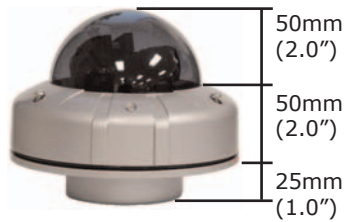

Outdoor Wall Mount Option With Gaskets and 3/4" & 1" Conduit Sized Access

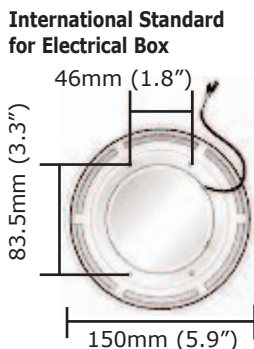

Environmental

Ambient operating temperature	-15° C ~ 55° C
Storage temperature	-25° C ~ 70° C

Mechanical

Dimensions WxHxD	Dome Only	150 x 125 x 150mm (5.9" x 4.9" x 5.9")
	Flush Mount 77V0117	30.5 x 150mm (1.5" x 6")
WxHxD	Wall Mount 78V0007	150 x 100 x 215mm (5.9" x 4" x 8.5")
	Interfaces	2.1mm male power connector Female power connector to flying leads Female BNC

See our other dome series:

Vandal resistant indoor 4" D4V7 series
Indoor 5" DB5S series
Ranges up to 5 ~ 33mm varifocal lens
- WDR & TDN options

