
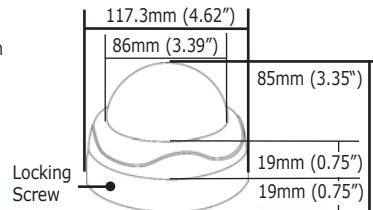


**TRUE DAY NIGHT** and **WIDE DYNAMIC RANGE** features expand usability from bright morning sunlight through late dusk. Videology's dome cameras can maintain a full-scene through intensive sun glare or auto headlights.



### 4" Vandal Resistant 3-Axis Indoor Dome with Wide Dynamic Range & True Day/Night Options

- 3-D Gimbal Rotation For Simple Mounting On Wall Or Ceiling
- Polycarbonate Fog Bubble & Base With Torx Head Screw
- 24VAC / 12VDC



### 5" Indoor Dome with Wide Dynamic Range & True Day/Night Options

- Ratchet Adjustment for Installation Ease
- 355° Pan / 90° Tilt
- 24VAC / 12VDC

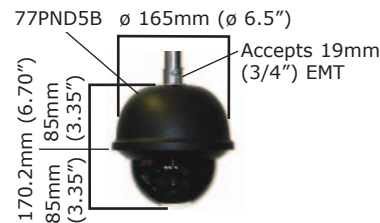

#### 5" Dome Accessories

**Included** 2.1mm to flying leads Power adapter

#### Optional

78V0004	Stainless steel drop ceiling adapter
77PND5B	Black ceiling pendant mount
77PND5C	White ceiling pendant mount
78V0003	Black plastic wall mount
78V0005	White plastic wall mount

### 5" Vandal/Weather Resistant 3-Axis Dome with Wide Dynamic Range & True Day/Night


- Ultra High Impact 5" Vandal / Weather Resistant Dome
- Polycarbonate Bubble and IP 67 Rated

#### 5" Dome Accessories


##### Optional

78V0019	Outdoor wall mount with gaskets
77V0020	Flush (surface) mount

#### Base (Flush Mount) (78V0020)



#### 78V0019 (Wall Mount)

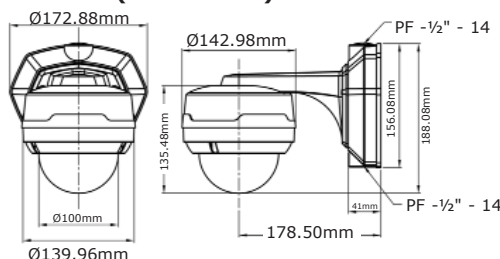



### Model Numbering System For Videology Dome Lines

Custom Configure Your Dome. Choose one option from each column. Transfer the option's bold-type code to that column's box. String together (some boxes may be blank) to arrive at your custom model number. ie. = **D 5 S \_ Z WI L4 D \_**

Ring	Class	Bubble	Sync	Camera Format	Special Features	Lens	Power	IP/Ethernet	PAL	Audio
<b>D, DB, DW</b>	<b>4, 5, 6</b>	<b>S, C, F, PF, PS, V</b>	Leave Blank or L	<b>9, 8, 7, 6, 4, 3, 2, 1</b>	Leave Blank or T, N, W, TR, TW	<b>CI, CV, VA, VB, WA, WB, XA, XB, L1.8, L2, L3, L4, L6, L8, L12, L16</b>	Leave Blank, or D	Leave Blank or I	Leave Blank or P	Leave Blank or A
<b>4" Dome Only</b>	<b>4 = 4.0" Dome</b>	<b>4" &amp; 6" Domes</b> <b>V = vandal resistant / fog (over all)</b>	Leave Blank = internal synchronization <b>L = line lock</b>	<b>9 = color</b> 460TVL 1/3" CCD	Leave Blank = No special Features <b>T = true day / Night</b> <b>N = day / Night</b> <b>W = wide dynamic Range</b> <b>TR = True Day / night &amp; Infrared LEDs</b> <b>Coming Soon</b>	<b>Varifocal</b> <b>CV = C/S</b> mount, no iris, 3.5 - 8mm <b>VA = manual</b> board mount 4 - 8mm <b>WA = manual</b> board mount 2.6 - 6mm <b>XA = manual</b> CS mount 5.5 - 33mm <b>YA = manual</b> board mount 2.8 - 10mm <b>ZA = manual</b> board mount 9 - 22mm	<b>4" Dome Only</b> = Dual voltage 12VDC / 24VAC <b>D = 12VDC</b>	Leave Blank = no audio <b>I = IP / Ethernet</b>	Leave Blank = NTSC <b>P = PAL</b>	Leave Blank = no audio <b>A = audio</b>
<b>5" Dome Only</b>	<b>5 = 5.0" Dome</b>	<b>5" Dome Only</b> <b>S = black Slotted</b> <b>C = white Slotted</b> <b>F = fog (over all)</b> <b>PF = Polycarbonate Fog</b> <b>PS = polycarbonate black slotted</b>		<b>8 = color</b> 460TVL 1/4" CCD	<b>WB = DC iris</b> board mount 4 - 8mm <b>WB = DC iris</b> board mount 2.6 - 6mm <b>XB = DC iris</b> CS mount 5.5 - 33mm <b>YB = DC iris</b> board mount 2.8 - 10mm <b>ZB = DC iris</b> board mount 9 - 22mm	<b>5" Dome Only</b> = Dual voltage 12VDC / 24VAC <b>D = 12VDC</b>				
<b>6" Dome Only</b>	<b>6 = 6.0" Dome</b>			<b>7 = color</b> 330TVL 1/3" CCD		<b>6" Dome Only</b> = Dual voltage 12VDC / 24VAC <b>D = 12VDC</b>				
<b>DW = white ring Weather / vandal proof Dome</b>				<b>6 = color</b> 330TVL 1/4" CCD						
<b>DW = Weather / vandal proof Dome</b>				<b>4 = b&amp;w</b> 570TVL 1/4" CCD						
				<b>3 = b&amp;w</b> 570TVL 1/3" CCD						
				<b>2 = b&amp;w</b> 420TVL 1/4" CCD						
				<b>1 = b&amp;w</b> 570TVL 1/3" CCD						
					<b>Fixed (mm)</b> <b>L1.8 = 1.8</b> <b>L2 = 2.45</b> <b>L3 = 2.97</b> <b>L3.6 = 3.6</b> <b>L4 = 3.8</b> <b>L6 = 6.0</b> <b>L8 = 8.0</b> <b>L12 = 12.0</b> <b>L16 = 16.0</b>					

Select models may not be available.  
Please contact your Videology sales representative for details.  
For More Information: (401) 949-5332 or sales@videologyinc.com  
02/26/08 PDS-Family Domes Rev E