



BOX CONTENTS


- 5.6" LCD monitor
- Rechargeable 12V 2.3Ah battery pack
- 13V battery charger
- 12V 1A power supply
- BNC video cable
- RCA audio cable
- Belt and strap

SAFEGUARDS & WARNINGS

1. To prevent fire or shock hazard, do not operate in extremely humid or dusty environments.
2. Operating temperature is between -40°C ~ +95°C. Avoid exposure to direct sunlight and drastic temperature changes.
3. In order to ensure reliable operation, do not block ventilation openings on the unit.

10/18/02 Rev. A

CONTROLS / CONNECTORS

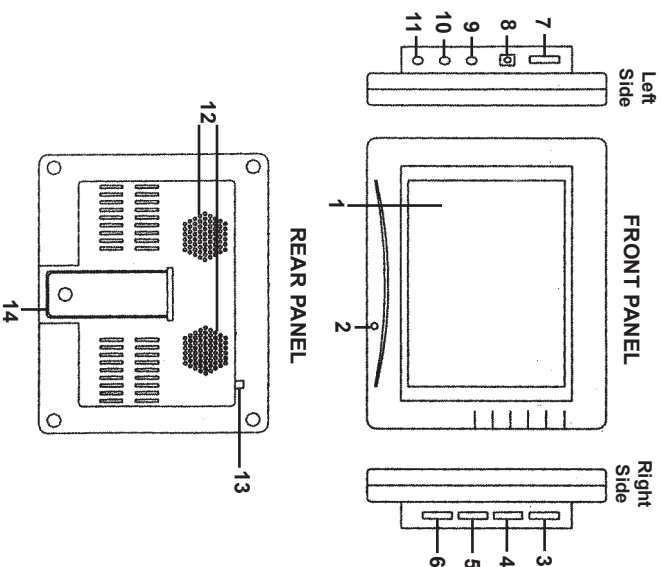

Front Panel

1. 5.6" TFT Color Screen Display
2. Power LED (green)

Right Side Panel

3. Brightness Adjustment
4. Contrast Adjustment
5. Color Adjustment
6. Audio Volume Adjustment

Left Side Panel

7. Power ON/OFF
8. 12V DC Power Input
9. Video Input
10. Earphone Audio Output
11. Audio Input

Rear Panel


12. Speaker Output 200mW
13. Mirror Mode Switch
14. Support Stand

OPERATION

1. Power
 - AC Adapter: 12V DC, 1000mA
 - Battery: 12V DC 2.3Ah
 - Battery Charger: 13V
2. Viewing Angle

The ideal viewing angle is within the following range:

 - Upper angle: 30°
 - Lower angle: 10°
 - Left angle: 45°
 - Right angle: 45°
3. Connection



- A. Video Input
- B. Earphone Audio Output
- C. Audio Input

ADJUSTMENTS

- Brightness Adjustment



- Contrast Adjustment



- Color Adjustment



- Audio Volume Adjustment



- Mirror Mode Switch

