

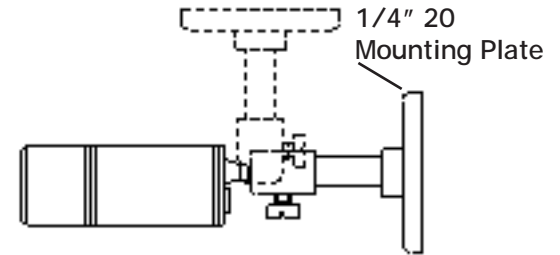




Camera Features

- Weather Resistant
 - Mounting Bracket
 - 380 TVL
 - Optional Sun Shield (60S0002)
 - 3.6mm lens
 - Superior performance from a slim 20mm diameter
 - <.01 Lux Sensitivity
 - Rugged Construction
- Color equivalent in the same diameter*

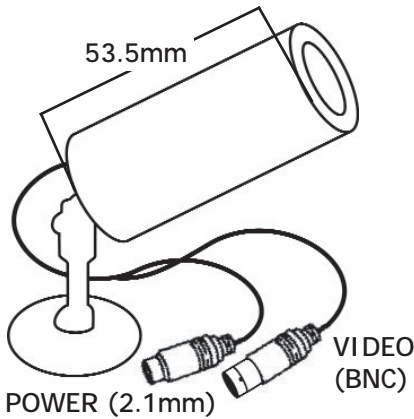

Technical Specifications

Electrical

	20W81W EIA	21W81W CCIR
CCD Sensor	1/3" Sony CCD	
Active pixels (HxV)	537 x 505	537 x 597
Horizontal Resolution	380 (TVL)	
Sensitivity	< .01 Lux	
Signal to noise ratio	> 45 dB	
Gamma	0.45	
Gain	AGC 18 dB	
Synchronization	Internal	
Shutter speed	1/60~1/100,000	1/50~1/100,000
Iris	CCD	
Video output	1Vp-p 75 ohms composite	
Power Supply	12VDC nominal (9-14VDC) regulated power supply recommended	
Power Consumption	< 1.2 W	

Environmental

Ambient operating temp.	-10° C ~ 55° C
Storage temp.	-20° C ~ 70° C

Mechanical

Dimensions L x Ø W	53.5mm x Ø 20mm	
Lens	3.6mm	
Connectors	Power	2.1mm Male Connector
	Video	Female BNC Connector

Accessories

Optional	60PR12DC500	12VDC regulated power supply
	60S0002	Metal sunshield
	20W93W	Color equivalent bullet camera