


### Monitor Features

- 4" TFT LCD
- Portable Case with Battery
- BNC Video Test Cable
- Audio In/Out
- Glare Shield
- Video Looping Output

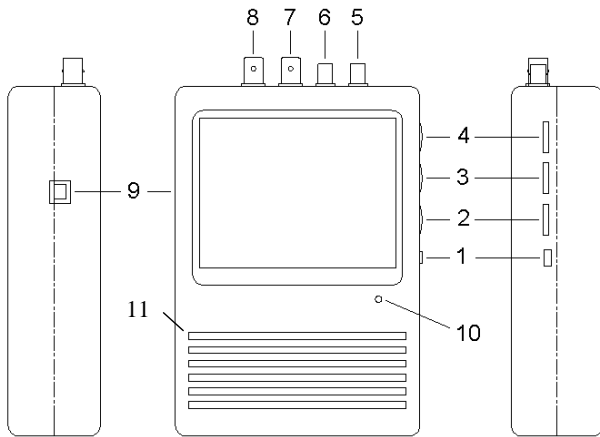

01. Monitor Power ON/OFF
02. Volume
03. Control Brightness
04. Color
05. Audio OUT
06. Audio IN
07. Video OUT
08. Video IN
09. DC 12V Input
10. Charger Indicator
11. Speaker

### Technical Specifications

#### Electrical

		45M040T
Display		4" Color TFT LCD
Number of Dots		480 (W) x 234 (H)
Display Area		82.11(W) x 61.77 (H)
Dot Pitch		0.171 (W) x 0.264 (H)
Color Configurations		R.G.B delta
Back Light		LED B/L
Input Signal	Video:	NTSC & PAL (auto-switch) composite video signal, 1.0 Vp-p/75 ohm. Negative
	Audio:	150~250mVp-p / 1.0
Input/Output Terminal	Video:	BNC Auto Termination
	Audio:	RCA Jack
Viewing Angle (min)		U/D/L/R 10/30/45/45
Brightness		250 nit (typ.)
Contrast Ratio		150:1 typical
Response Time		Tr: 15ms Tf: 20ms (Typ)
Power Voltage		1.2Volts x 6 (Size "AA") 2200mAH Rechargeable batteries
Power Consumption		3.0 W max

#### Environmental

Operating Temperature	-10° C ~ 60° C (14° F ~ 140° F)
Storage Temperature	-20° C ~ 80° C (-4° F ~ 176° F)
Operating Humidity	Max.85%RH
Storage Humidity	Max.85%RH

#### Mechanical

Dimensions W x H x D	152mm x 105.6mm x 38.6mm (5.98" x 4.15" x 1.51")
Weight	320g / 8.11 oz (w/o battery)
Side Panel Controls	Volume, Color, Contrast, Brightness
Housing Construction	ABS Plastic (LCD), Leather Case
Lamp Life-time	10,000hr min. (Temp=25°C)

#### Accessories

Included	12V 1A Power Supply, 6 (AAA) NI-MH rechargeable batteries, power adaptor, leather case, Belt
----------	--