



Product Features

- NTSC/PAL auto detect
- High resolution (1280 x 1024)
- Inputs/outputs:
 - 2 BNC composite video
 - S-video
 - 2CH audio (RCA) & PC IN
- Auto termination (75 Ohms)
- Anti-glare panel
- VESA standard bracket (75mm/100mm) & desktop mount
- Easy OSD Menu User Interface
- Remote control

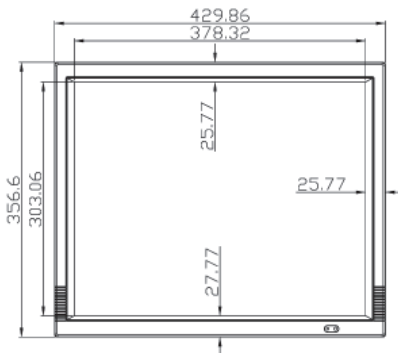

Back Panel

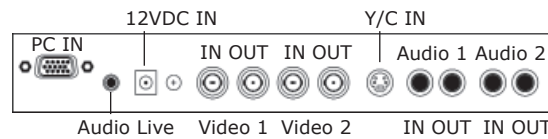

Technical Specifications

| Electrical | 45M19H |
|--------------------|--|
| Operating System | NTSC/ PAL/ XGA/ VGA/ SVGA |
| Picture Size | 15" diagonal |
| Resolution (H x V) | 1280 x 1024 pixels |
| Dot Pitch (W x H) | 0.294mm x 0.294mm |
| Brightness | 250 cd/m ² |
| Contrast Ratio | 500:1 |
| Response Time | 16ms |
| Backlight | CCFL |
| Input Signal | Video: 2 CH 1Vp-p composite video at 75 Ohms S-Video: Y=1.0Vp-p w/neg. sync C=0.285Vp-p PC: Analog RGB |
| Video Angle | Left 80°, Right 80°, Up 80°, Down 55° |
| Lamp Life-time | 40,000 hrs |
| Power Source | 12VDC/ 90~260V AC 60Hz/ 50Hz adapter |
| Power Consumption | 18W (max)/ 1.5A |

Environmental

| | |
|-----------------------|-----------------------------|
| Operating Temperature | -10°C ~ 50°C (14°F ~ 122°F) |
| Operating Humidity | 20% - 85% R.H. |

Mechanical

| | |
|----------------------|--|
| Dimensions W x H x D | 429.86mm x 356.6mm x 66.7mm (16.92" x 14.03" x 2.62") |
| Weight | 7.8 kg (17.2 lbs) |
| Connectors | Video: 2 BNC inputs/output 1 S-Video 4-pin Mini DIN Audio: 2 RCA input/output 1 Ø3.5mm jack input PC: 1 15-pin D-sub connector |

Accessories

| | |
|----------|----------------------------|
| Included | Power supply |
| | Power cord |
| | 15 pin D-sub |
| | 12VDC / 24VAC adapter |
| | Bracket: VESA 100 standard |

Safety Standards

| | |
|--|---------|
| | FCC, CE |
|--|---------|