


Product Features

- TFT active matrix display
- LED backlight
- NTSC/ PAL selectable
- Mirror mode, horizontal flip
- On screen display
- AV1/ AV2 input
- FCC, FE
- Plastic frame

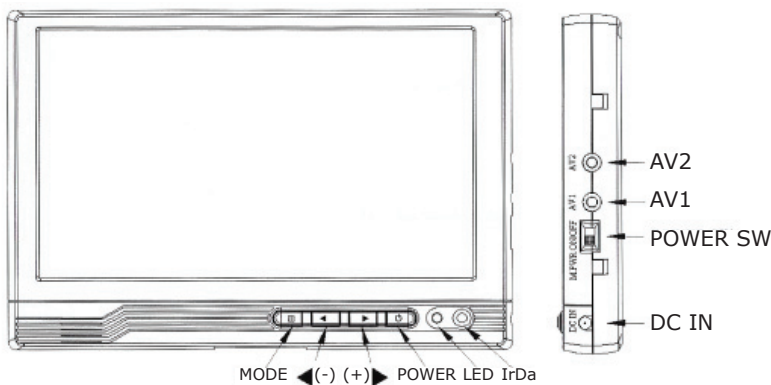

Technical Specifications

Electrical	45M070
Display	7.0" TFT Color LCD with LED B/L
Resolution	1440 x 234
Action Area	154.08(W) X 86.58(H)
Dot Pitch	0.107(W) X 0.370(H)
System	NTSC / PAL Selectable
Viewing Angle	Up/Down/Left/Right: 50°/70°/70°/70°
Response Time	Tr = 12ms max. Tf = 18ms max
Brightness	400 nit
Contrast Ratio	400:1
Video Input	2CH A/V Input 1.0Vp-p at 75 Ohms
Audio Input	2CH Input (MONO) 30Mv~100mVp-p
Video Audio Connector	Mini Phone Jack / Mini Phone Plug to RCA Plug Adapter
USER Control	OSD Control: Mode, <, >, Power
Power	12VDC +/- 10%
Power Consumption	3.2W

Environmental

Operating Temperature	0°C ~ 50°C (32°F ~ 122°F)
Operating Humidity	30% ~ 90%
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Storage Humidity	30% ~ 90%
Lifetime MTBF	> 150,000 hrs
Packaging	ESD safe package

Mechanical

Dimensions W x H x D	179.6mm x 120mm x 23mm (7.07" x 4.72" x 0.9")
Weight	350g (12.35oz) (monitor) 870g (30.69oz) (monitor and bracket)
OSD Controls	Volume, Contrast, Brightness, Hue, Color, Sharpness
Connectors	Mini-phone Jack, Mini-phone Plug to RCA Plug Adapter

Accessories

Included	Mounting Bracket, Power Supply, 2 - AV Cables
----------	---