


Product Features

- TFT active matrix display
- LED backlight
- NTSC / PAL auto switch
- On screen display
- PIP control function (only PC/video)
- Metal case
- VESA standard bracket

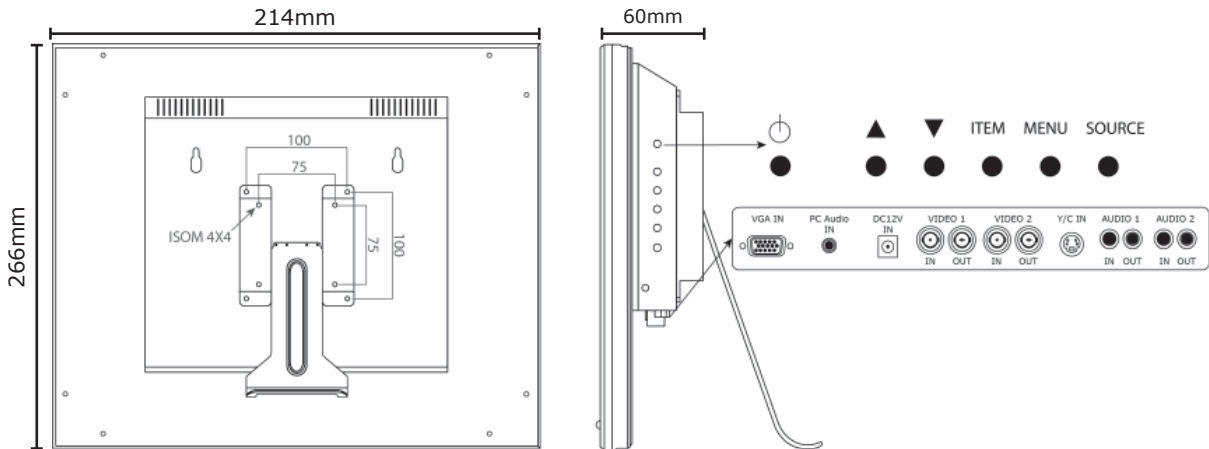

Technical Specifications

| Electrical | 45M10-3 |
|--------------------|---|
| Display | 10.4" TFT Color LCD with LED B/L |
| Resolution | 1024 x 768 Max |
| Active Area (mm) | 221.2(W) X 158.4(H) |
| Aspect Ratio | 4 : 3 |
| Display Colors | 16.7M |
| System | NTSC / PAL Selectable |
| Viewing Angle | Up/Down/Left/Right: 75°/75°/75°/75° |
| Response Time | Tr = 16ms max. Tf = 16ms max |
| Brightness | 350 cd/m ² |
| Contrast Ratio | 900:1 |
| Video Input/Output | 2CH A/V Input/Output (1.0Vp-p at 75 Ohms) S-Video Input - 1 x 4 Pin Mini Dim |
| Audio Input/Output | RCA |
| PC Input | VGA D-Sub 15 |
| USB 2.0 Input | USB 2.0 "A" |
| USER Controls | OSD Control: Mode, <, >, Power |
| Power Input | 12 VDC +/- 10% |
| Power Consumption | 12.0W |

Environmental

| | |
|-----------------------|-----------------------------|
| Operating Temperature | 0°C ~ 50°C (32°F ~ 122°F) |
| Storage Temperature | -20°C ~ 80°C (-4°F ~ 176°F) |

Mechanical

| | |
|----------------------|---|
| Dimensions W x H x D | 266mm x 214mm x 60mm (10.47" x 8.43" x 2.36") |
| Weight | 2.3 kg (5.07 lbs) |
| OSD Controls | Volume, Contrast, Brightness, Hue, Color, Sharpness |

Accessories

| | |
|----------|---|
| Included | Mounting Bracket, Power Supply, AV Cables |
|----------|---|