



### Product Features

- NTSC/PAL auto selectable
- Ultra high resolution (1280 x 1024 pixels)
- IR remote control enabled
- Inputs/outputs:  
1 BNC composite video, 1 S-video, 1CH audio (RCA) and 1 PC input
- Auto termination (75 Ohms)
- VESA standard bracket and desktop mount
- Easy OSD menu user interface
- Anti-glare panel
- 3D comb filter
- Built-in speaker

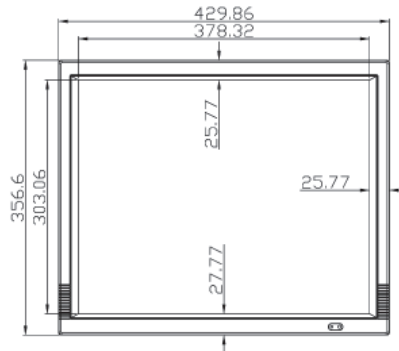

Back Panel

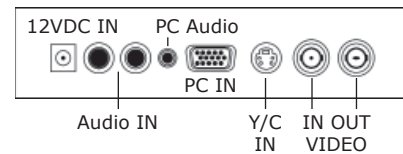

### Technical Specifications

<b>Electrical</b>	45M17
Operating System	NTSC/ PAL/ XGA/ VGA/ SVGA
Picture Size	17.25" diagonal
Resolution (H x V)	1280 x 1024 pixels
Aspect Ratio	4:3
Dot Pitch (W x H)	0.294mm x 0.294mm
Brightness	300 cd/m <sup>2</sup>
Contrast Ratio	800:1
Response Time	Tr: 1.2ms Tf:3.8ms
Backlight	CCFL
Input Signal	Video: 1 CH 1Vp-p composite video at 75 Ohms S-Video: Y=1.0Vp-p w/neg. sync C=0.285Vp-p PC: Analog RGB
Video Angle	Left 85°, Right 85°, Up 75°, Down 85°
Lamp Life-time	40,000 hrs
Power Source	12VDC/ 90~260V AC 60Hz/ 50Hz adapter
Power Consumption	18W (max)/ 1.5A

### Environmental

Operating Temperature	-10°C ~ 50°C (14°F ~ 122°F)
Operating Humidity	20% - 85% R.H.

### Mechanical

Dimensions W x H x D	429.86mm x 356.6mm x 66.7mm (16.92" x 14.03" x 2.62")
Weight	7.8 kg (17.2 lbs)
Connectors	Video: 1 BNC inputs/output 1 S-Video 4-pin Mini DIN Audio: 1 RCA input/output 1 Ø3.5mm PC/phone jack input PC: 1 15-pin D-sub connector

### Accessories

Included	Power supply
	Power cord
	15 pin D-sub
	12VDC / 24VAC adapter
	Bracket: VESA 100 standard

### Safety Standards

FCC, CE, RoHS
---------------