




Monitor Features

- 5.6" Screen
- Portable Case with Battery
- BNC Video Test Cable
- Audio
- Glare Shield

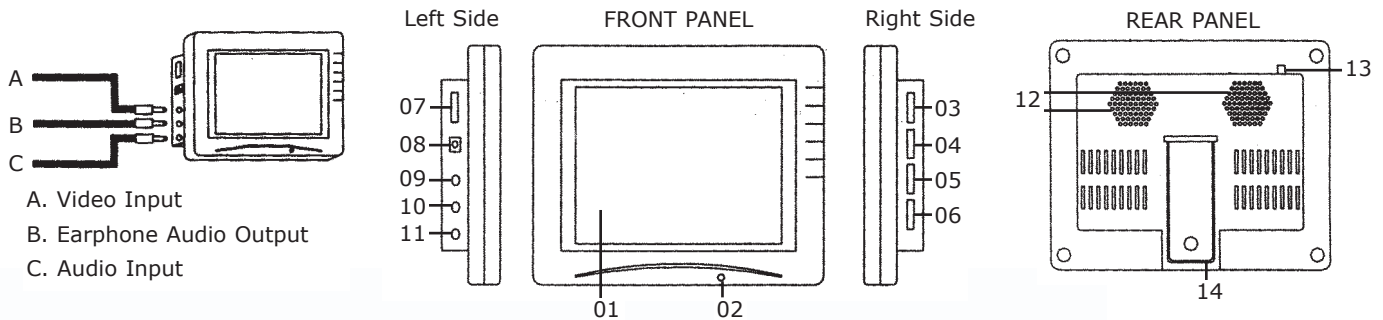

Technical Specifications

Electrical

| | |
|--------------------|-------------------------------------|
| | 45T056 |
| Operating System | NTSC |
| Picture Size | 5.6" diagonal |
| Resolution (H x V) | 320 x 240 Pixels |
| Mirror mode | On/off |
| Brightness | 270 cd/m ² |
| Dot Pitch | 0.116 x 0.348 |
| Video Input | 0.75Vp-p ~ 1Vp-p (BNC) |
| Audio Input | 50mV (min), Stereo In (Stereo mini) |
| Power Source | 12VDC 600mA (optimal) |
| Power Consumption | <8W |

Environmental

| | |
|----------------------|----------------|
| Operating temp. | -40° C ~ 95° C |
| Operational Humidity | 30% ~ 80% |

Mechanical

| | |
|----------------------|--|
| Dimensions W x H x D | 162mm x 133mm x 54mm |
| Weight | 3.5 lbs |
| Included Accessories | Belt Strap, Cables, Rechargeable 12V 2.3Ah Battery, 13V Battery Charger, 12V 1A Power Supply |
| Side Panel Controls | Volume, Color, Contrast, Brightness |
| Housing Construction | ABS Plastic (LCD), Padded Case |

Controls and Connectors

| | |
|------------------|---|
| Front Panel | 01. 5.6" TFT Color Screen Display 02. Power LED (green) |
| Right Side Panel | 03. Brightness Adjustment 04. Contrast Adjustment 05. Color Adjustment 06. Audio Volume Adjustment |
| Left Side Panel | 07. Power ON/OFF 08. 12V DC Power Input 09. Video Input 10. Earphone Audio Output 11. Audio Input |
| Rear Panel | 12. Speaker Output 200mW 13. Mirror Mode Switch 14. Support Stand |

