


Product Features

- HD/ EX-SDI transmission up to 150m over CAT.5e/CAT6
- HD-SDI system applicable simply without re-cabling from your old analog systems
- Cost effective way compared to high priced optical systems
- Compact size and ultralight case for easy installation
- Surge protection built-in
- RS-485 communication

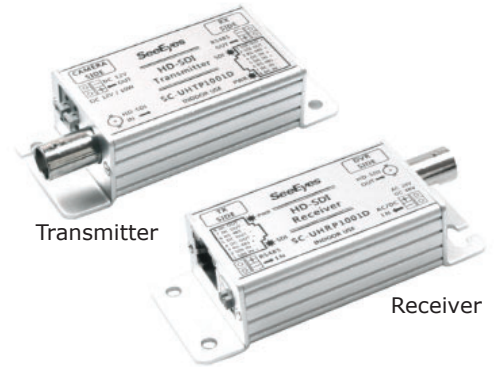

Technical Specifications

		60TR0004	
		Transmitter	Receiver
Video In		HD-SDI	EX-SDI
Video Out		EX-SDI	HD-SDI
Power Consumption		1.5W	1.5W
Power In		12VDC/ 0.5A	
Operating Temperature		-10°C ~ 50°C (14°F ~ 122°F)	
Operating Humidity		0-80%	
Weight		54g	54g
Dimensions (W x H x D)		83mm x 33mm x 22mm	83mm x 33mm x 22mm
Max Transmission Distance		UTP cable (CAT.5e/CAT6) max 150m	
Connection Port	SDI	IN/OUT BNC_F (75Ω)	
	Signal	IN/OUT RJ45	
	Power	Terminal Block	
	RS-485	Terminal Block	
LED	Yellow	ON/Power IN	
	Green	ON/Signal IN	