



Power Supply Features


The 60P24X camera power supply provides a unique series of features which allow easier installation, greater reliability and unequalled flexibility—all for a very economical price. It is ideal in any multi-camera installation, avoiding the need to tie up one electrical outlet per camera, and providing significant advantages over multiple plug-in transformers in safety, convenience, neatness and cost.

Power is provided by a **UL Class II transformer**, which is connected to a distribution board, providing screw terminal connections for the specified number of cameras. Input power is 120V AC. 220V models are available upon request.

Each output is protected by a (self-resetting **SmartFuse**). This reacts like a glass fuse but resets itself when the surge has passed or the fault is removed, eliminating costly service calls to replace blown fuses.



60P2409 Displayed

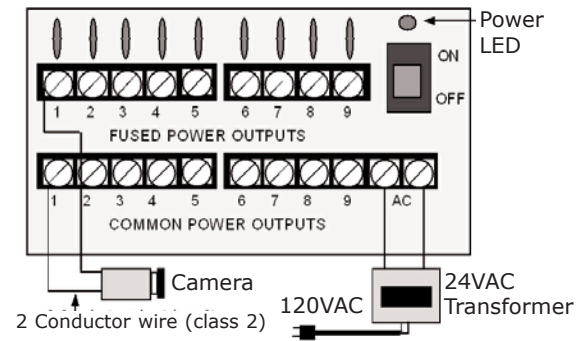

Technical Specifications

	60P2424-1
Dimensions (WxHxD)	285.75 x 285.75 x 95.25mm (11.25" x 11.25" x 3.75")
Weight	5.9kg (13 lbs)
Camera Outputs	24 Each output protected by a 1.1 Amp self-resetting SmartFuse Positive Thermal Coefficient (PTC)
Power (max)	12 Amps (max)
Voltage Input	110/120V AC
Voltage Output	24V AC
Current Output	12 Amps (max)
LEDs	LED indicator light for AC power

	60P2409
Dimensions (WxHxD)	187.32 x 211.14 x 92.07mm (7.38" x 8.31" x 3.63")
Weight	2.82kg (6.2lbs)
Camera Outputs	9 Each output protected by a 1.1 Amp self-resetting SmartFuse Positive Thermal Coefficient (PTC)
Power (max)	4 Amps (max)
Voltage Input	110/120V AC
Voltage Output	24V AC
Current Output	4 Amps (max)
LEDs	LED indicator light for AC power

Note: It is your responsibility to conform to all applicable codes.

03/11/09 PDS-60P24X REV A

All data subject to change without notice.

Videology® Imaging Solutions, Inc.



37M Lark Industrial Parkway
Greenville, Rhode Island 02828 USA
Tel: (401) 949 - 5332 Fax: (401) 949 - 5276
North/South American Sales: Sales@videologyinc.com

Videology® Imaging Solutions, Europe B.V.

Neutronenlaan 4
NL-5405NH Uden, The Netherlands
Tel: +31 (0) 413 256261 Fax: +31 (0) 413 251712
European Sales: Info@videology.nl