




Camera Features

- True Day/Night Gen II With IR Filter Retraction On CCD Maximizes Sensitivity In B&W Night Scenes
- 26x Optical Zoom (10x Digital)
- 1/4" Sony Super HAD CCD, 480 TVL
- S-Video & CVBS
- 8 IR LEDS And CDS Sensor
- RS232 & Wired Remote Control



Please refer to the Owner's Manual (Installation) for connecting KEY information.

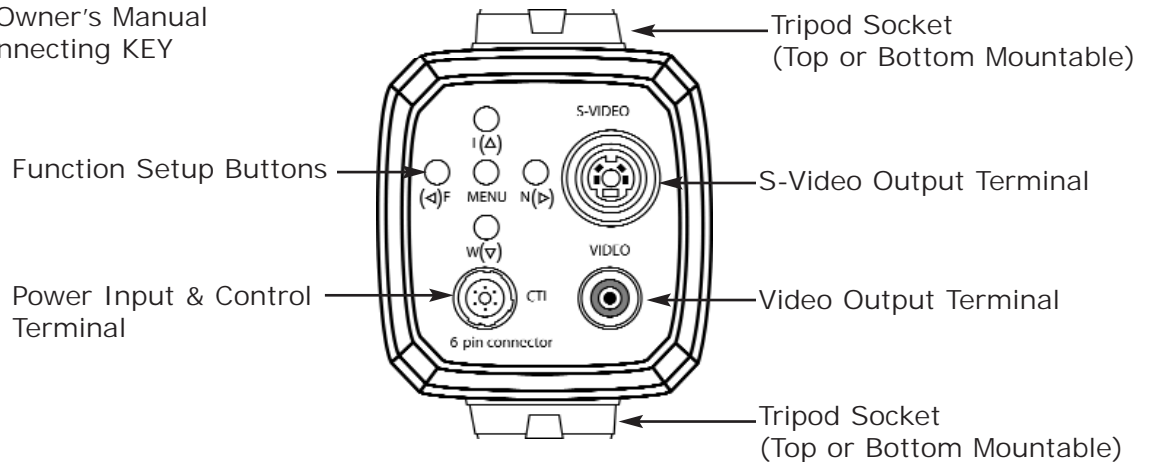

Connecting The 6-pin Connector (for controller)

Pin #	Name	I/O	Color	Note
1	ZOOM (+ Tele, - Wide)	Input	Green	± 6V (Limit +3 - 13V, -3 ~-13V)
2	FOCUS (+ Near, - Far)	Input	White	± 6V (Limit +3 - 13V, -3 ~-13V)
3	KEY	Input	Brown	Or Blue
4	GND (For ZOOM, FOCUS)		Yellow	
5	GND (For Power)		Black	
6	DC IN	Input	Red	12VDC ±0.5V

Connecting The 6-pin Connector (for RS-232C)

Pin #	Name	I/O	Color	Note
1	RD (For RS-232C)	Input	Green	+12V ~ -12V
2	TD (For RS-232C)	Output	White	+12V ~ -12V
3	KEY	Input	Brown	Or Blue
4	GND		Yellow	
5	GND (For Power)		Black	
6	DC IN	Input	Red	12VDC ±0.5V